

FPA-5000 With Functional Modules

www.boschsecurity.com



BOSCH
Invented for life



- ▶ Modular configuration allowing for easy extension
- ▶ Interconnection of up to 32 Panel Controllers, Remote Keypads, and OPC servers
- ▶ Multiple CAN loop connection with high-performance Ethernet backbone and redundancy
- ▶ Installation and auto-detection of functional modules by simply plugging them into the panel rail
- ▶ Connection to BIS Building Integration System via OPC server


Thanks to the modular configuration, the innovative FPA-5000 Modular Fire Panel easily adapts to local circumstances and regulations. Due to the different functional modules, country-specific characteristics are accommodated in the connection just as quickly as the respective alarm handling.

The fire panel is available with two different housings:

- Housing for mounting directly on the wall
- Frame installation housings which are fitted to the mounting frame and can be swiveled

With the aid of special mounting kits, the housings can be mounted in 482.6 mm (19") cabinets. All housings can be extended with various additional housings for all conceivable applications.

The FMR-5000 Remote Keypad offers the decentralized operation of a control panel or control panel network. Thanks to the external CAN and Ethernet interfaces, several Panel Controllers and Remote Keypads can be interconnected. Using either a single-loop structure or multiple-loop structures with Ethernet backbone, the network can be adapted to nearly every application conditions.

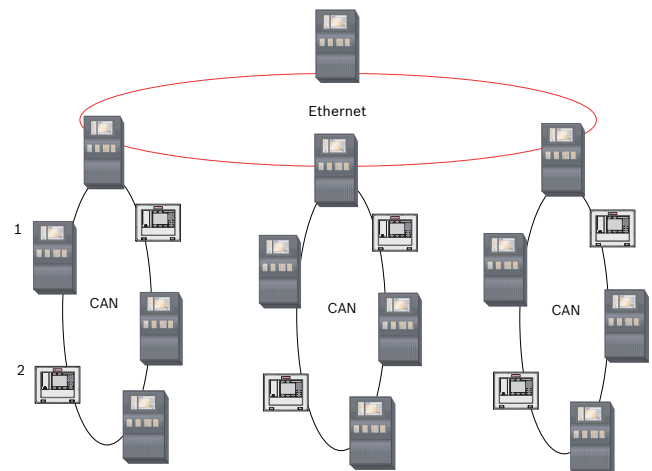


CAN/Ethernet Network

- 1 Fire panel
- 2 Remote Keypad

Additionally, the Ethernet interfaces allow the connection to: Building Management System BIS, Voice Alarm System Praesideo/PAVIRO, Remote Services, FSM-2500/FSM-5000 Fire Monitoring System.

FPA-5000 systems can be connected to the Bosch UGM Universal Security System and thus, be integrated into a large network system. The entire fire detection system is configured via a laptop using the FSP-5000-RPS Programming Software.

System overview

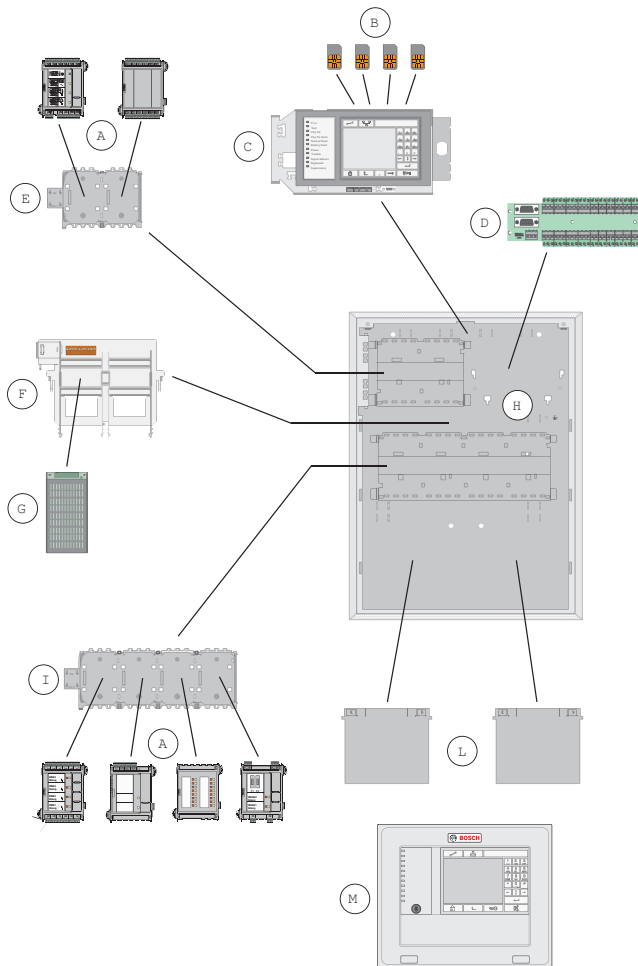

Pos.	Description
A	Functional Modules
B	Address Cards / License Keys
C	Panel Controller
D	Distributor, optional
E	Panel Rail Short
F	Power Supply Bracket (installed in Frame Installation Housings ex-works)
G	Power Supply
H	Housing (in this case HCP 0006 A)
I	Panel Rail Long

- L Batteries
- M Remote Keypad

Functions

Operation / processing of messages

The operation and the processing of all messages are easy and intuitive thanks to the ergonomically-designed control panel with its TFT touch-screen offering a menu-driven handling and multi-color display. To that end, there are permanently located keys on the right, bottom, and upper edge of the display as well as variably located virtual keys in the touch-screen area.

Modular Structure

Due to its modular structure, the FPA-5000 Modular Fire Panel provides complete flexibility and thus customized solutions for any application.

Depending on the requirements, the following selection can be made when planning:

1. Housing type: Frame installation or wall-mount
 - Selection of a basic housing
 - Optional Extension Housings
 - Optional Power Supply Housings
 - Optional kits for installation in 48 cm (19") racks
2. Operating and Display Unit with Panel Controller
 - Selection from the various language variants
3. Panel Rail
 - Selection according to housing type and/or number of required functional modules
4. Functional modules
 - Selection based on planning and country-specific requirements
5. Power supply
 - Batteries
 - Additional power supply facilities
 - Power Supply Brackets are preinstalled ex-works for Frame Installation Housings
 - For Wall-mount Housings, Power Supply Brackets are selected as needed
6. Additional accessories
 - Front Doors
 - Printer with Frame Installation Housing
 - Cable Sets for special applications

Modules

The functional modules are autonomous, encapsulated units that can be inserted into any control panel slot using plug-and-play technology. Thus, the power supply and the data traffic to the control panel are indicated automatically without any additional settings. The module is automatically identified by the control panel and functions in the default operating mode.

Wiring to external components is performed using compact connector/screw terminals.

After a replacement, only the connectors need to be reinserted; extensive rewiring is no longer required.

Module	Description
BCM-0000-B	Battery Controller Module <ul style="list-style-type: none"> module that controls batteries and power supply
ANI 0016 A	Annunciator Module <ul style="list-style-type: none"> with 16 red and 16 yellow LEDs, freely programmable
LSN 0300 A	LSN improved Module 300 mA <ul style="list-style-type: none"> for the connection of an LSN loop with up to 254 LSN improved elements or 127 standard LSN elements, maximum line current 300 mA
LSN 1500 A	LSN improved Modul 1500 mA <ul style="list-style-type: none"> for the connection of an LSN loop with up to 254 LSN improved elements, maximum line current 1500 mA, or with up to 127 standard LSN elements, maximum line current 300 mA
FPE-5000-UGM	Interface Module <ul style="list-style-type: none"> for the connection to a UGM 2020 System
CZM 0004 A	4 Zone Conventional Module <ul style="list-style-type: none"> for the connection of existing conventional peripherals, with 4 monitored conventional lines
IOS 0020 A	20 mA Communication Module <ul style="list-style-type: none"> with an S20 interface and an RS232 interface for a connection with a voice alarm system Plena via RS232
IOS 0232 A	RS232 Communication Module <ul style="list-style-type: none"> with two RS232 interfaces for a connection with a voice alarm system Plena , a printer or laptop
ENO 0000 B	Fire Service Interface Module <ul style="list-style-type: none"> for the connection to fire service equipment according to DIN 14675
IOP 0008 A	Input/Output Module <ul style="list-style-type: none"> with 8 digital inputs and 8 open collector outputs
RML 0008 A	Relay Module <ul style="list-style-type: none"> with 8 relays for low voltage applications
RMH 0002 A	Relay Module <ul style="list-style-type: none"> with 2 relays for mains power (250 V) and with feedback inputs (can also be used as an interface to extinguishing systems)
NZM 0002 A	Notification Appliance Zone Module <ul style="list-style-type: none"> with 2 monitored primary lines

Networking

Up to 32 Panel Controllers, Remote Keypads and OPC server can be interconnected within a network. Depending on the application requirements, Panel Controllers and Remote Keypads can be grouped,

defined as network node or local node. Within a group, only panel conditions of the same group can be displayed. Regardless of the groups, network nodes allow for the display and handling of all panel conditions. Local nodes display the conditions of the related panel.

When networking via CAN and/or Ethernet interfaces, the following connection topologies are optional:

- Redundant loop via CAN1 and CAN2 (max. 32 nodes)
- Ethernet loop (max. 32 nodes)
- Multiple CAN loops with Ethernet backbone and up to 32 nodes

For networking with optical fibers, you can use various converters. For detailed information on suitable converter types and maximum line lengths, refer to the FPA-5000 Networking Guide (available for download).

Detection Points

The Address Cards activate detection points. The FPA-5000 governs up to 4096 detection points.

Each element and input which is able to set off an alarm requires a detection point.

Inputs are considered as detection points if they are programmed accordingly in the FSP-5000-RPS Programming Software.

This applies to all manual call points and automatic detectors as well as to the following modules and interfaces because of their inputs:

Modules	Detection Points
CZM 0004 A	up to 4
IOP 0008 A	up to 8
RMH 0002 A	up to 2
ENO 0000 B	requires 1 detection point only if a FSE release element is connected and programmed using the FSP-5000-RPS programming software
FPP-5000-TI	2
Interface modules	Detection Points
FLM-420/4-CON	up to 2
FLM-420-I8R1-S	up to 8
FLM-420-I2	up to 2
FLM-420-O8I2-S	up to 2
FLM-420-O1I1	up to 1
FLM-420-RHV	Up to 2
FLM-420-RLE-S	up to 2

Certifications and approvals

The provided options according to EN 54-2:1997/ A1:2006 include:

- Output to fire alarm devices
- Control of fire alarm routing equipment
 - Output to fire alarm routing equipment

- Alarm confirmation input from fire alarm routing equipment
- Outputs to fire protection equipment
 - Output type A
 - Output type B
 - Output type C
 - Fault monitoring of fire protection equipment
- Delays to outputs
- Dependencies on more than one alarm signal
 - Type A dependency
 - Type B dependency
- Alarm counter
- Fault warning condition
 - Fault signals from points
 - Total loss of the power supply
 - Output to fault warning routing equipment
- Disabled condition
 - Disabling of addressable points
- Test condition

- It is preferable to use the loop formation owing to the greater security of loop lines compared with stub lines.
- Consider the system limit for the number of LSN elements.
- It is possible to combine LSN interface modules and LSN detectors on one loop or stub line.
- For a mixed connection of LSN classic elements and LSN improved elements, a maximum of 127 elements are permitted.
- Existing conventional detectors can be connected to a CZM 0004 A module. A CZM 0004 A module provides four DC primary lines (zones).
- In accordance with EN 54-2, control panels with more than 512 detectors / call points must be connected redundantly. To that end, a second basic housing with a second MPC Panel Controller is used.
- For operation of the fire detection system according to EN 54-13, it is necessary to terminate every stub and T-tap with EOL-modules.

Region	Regulatory compliance/quality marks	
Germany	VdS-S	S205106 BS FPA 4620/DT/2010 FPA-5000
Germany	VdS	G 205106 FPA-5000_G205106
	DIBt	Z-6.5-2027 (B) FSA 5000 LSN
	DIBt	Z-6.5-2027 (E) FSA 5000 LSN
Switzerland	VKF	AEAI 19197 FPA-1200_FPA-5000 Brandmeldesystem
Europe	CE	FPA-5000
	CPD	0786-CPD-20818 FPA 5000
Austria	PFB	007/BM-PSys/019 FPA-1200/5000 Brandmeldesystem
	PFB	007/BM-PSys/020 FPA-1200/5000 Brandfallsteuerzentrale
	PFB	007/BM-PSys/021 FPA-5000 Hierarchie
Belgium	BOSEC	TCC2-894 FPA 1200_FPA 5000
Poland	CNBOP	1793/2013 FPA-5000
Denmark	DANAK	232.234 FPA 5000/1200 system certifikat EN54-13
Hungary	TMT	TMT-32/2005 FPA-5000
Ukraine	MOE	UA1.016.0008784-11 FPA-5000
	MOE	UA1.016.0137711-13 FPA-5000
Singapore	PSB	CLS1B 13068137901 FPA-5000

Installation/configuration notes

- Country-specific standards and guidelines must be considered during planning.
- Connection conditions for the regional authorities and institutions (police, fire service) must be maintained.

General System Limits

	Max. number
Panels/remote keypads/OPC server in the network	
• Ethernet / CAN loop	32
• CAN bus	8
LSN elements	
• Stand-alone panel	4096
• Per network panel	2048
• Total network	32768

Limits per fire panel	Max. number
Sets, e.g. bypass group	192
Functional modules	46
Printer	4
Alarm counters (external, internal, testing)	3
Entries in the event database	10000
FSP-5000-RPS configuration interfaces (USB, COM)	2
Maximum number of outputs (sounders, controls, etc.) activated in parallel due to the same event	508

Configuration limits per fire panel (FSP-5000-RPS)	Max. number
Time channels	20
Time control programs	19
Configuration for a Specific Day	365

Permission levels	4
User profiles	200

System Limits Functional Modules

Functional module	Max. number
BCM-0000-B	8
ANI 0016 A	32
LSN 0300 A	32
LSN 1500 A	11
FPE-5000-UGM	4
CZM 0004 A	32
IOS 0020 A	4
IOS 0232 A	4
ENO 0000 B	8
IOP 0008 A	32
RML 0008 A	32
RMH 0002 A	32
NZM 0002 A	8

System Limits for each LSN 0300 A Module

- Up to 254 LSN improved version elements or 127 classic LSN elements can be connected
- Output current
 - LSN 0300 A: up to 300 mA
 - LSN 1500 A: up to 1500 mA
- Cable length
 - LSN 0300 A: up to 1600 m
 - LSN 1500 A: up to 3000 m
- Unshielded cables can be used



Notice

Owing to the Planning Software by Bosch, the planning of fire panels in compliance with the limits (e.g. concerning cable length and power supply) is quick and easy.

Installation Notes

- Fire panels can only be installed in dry, clean interior rooms.
- To ensure optimum battery service life, the control panel should only be operated at sites with normal room temperatures.
- The following environmental conditions must be noted:
 - Permissible ambient temperature:
-5 °C – 50 °C
 - Permissible relative humidity:
Max. 95 %, non-condensing
- Operating and display elements should be located at eye level.

- Frame installation housings require at least 230 mm free space on the right next to the last housing; this space is for swiveling out the attached housing for connection, maintenance, and service.
- Sufficient space should be left underneath and next to the control panel for any possible extensions, e.g. for an additional power supply or an extension housing.
- Do not operate devices showing condensation.
- Only use the mounting materials specified by BOSCH ST. Interference resistance cannot otherwise be guaranteed.
- If connected to a Building Management System (BIS Bosch Building Integration System) via the Ethernet and an OPC server, please verify with the responsible network administrator that in case of a network spanning multiple buildings:
 - the network is designed for connections across multiple buildings (e.g. no interference by different potentials of the ground connection)
 - all users are assigned to the network

Technical specifications

General System Limits

	Max. number
Panels/remote keypads/OPC server in the network	
• Ethernet / CAN loop	32
• CAN bus	8
LSN elements	
• Stand-alone panel	4096
• Per network panel	2048
• Total network	32768

Ordering information

BCM-0000-B Battery controller module

monitors the power supply of the fire panel and the charging of the batteries
Order number **BCM-0000-B**

ANI 0016 A Annunciator module

displays the status of 16 individually programmable detection points
Order number **ANI 0016 A**

LSN 0300 A LSN bus module, 300mA

for connecting an LSN loop with up to 254 LSN improved elements or 127 classic LSN elements, with a maximum line current of 300 mA
Order number **LSN 0300 A**

LSN 1500 A LSN bus module, 1500mA

for connecting an LSN loop with up to 254 LSN improved elements with a maximum line current of 1500 mA, or with up to 127 classic LSN elements, with a maximum line current of 300 mA

Order number **LSN 1500 A**

FPE-5000-UGM Module interface to UGM

for connecting the fire panels FPA-5000 and FPA-1200 to superordinate systems (UGM 2020, FAT 2002/RE, FSM-2000)

Order number **FPE-5000-UGM**

CZM 0004 A Conventional zone module

for connecting conventional peripherals; provides four monitored conventional lines

Order number **CZM 0004 A**

IOS 0020 A Communication module, 20mA

provides one interface of each S20 and RS232

Order number **IOS 0020 A**

IOS 0232 A Communication module, RS232

for connecting two devices, e.g. voice alarm system Plena, a laptop or a printer, via two independent serial interfaces

Order number **IOS 0232 A**

ENO 0000 B External notification module

for connecting fire service equipment in compliance with DIN 14675

Order number **ENO 0000 B**

CPA 0000 A Cable set panel control to analog transm

Used to connect an AT 2000 to the MPC and the ENO 0000 B.

Order number **CPA 0000 A**

IOP 0008 A Input-output module

for individual displays or flexible connection of various electrical devices, providing eight independent digital inputs and eight open collector outputs

Order number **IOP 0008 A**

RML 0008 A Relay module low-voltage

provides 8 change-over contact relays (type C) for low voltage

Order number **RML 0008 A**

RMH 0002 A Relay module high-voltage

provides 2 change-over contact relays (type C) for high voltage, for monitored connection of external elements with feedback

Order number **RMH 0002 A**

NZM 0002 A Notification appliance zone module

for connecting 2 separate notification appliance zone lines, provides 2 monitored primary lines

Order number **NZM 0002 A**

Accessories**FLM-320-EOL2W End-of-line module, 2-wire**

for EN 54-13 compliant termination of conventional lines

Order number **FLM-320-EOL2W**

FLM-420-EOL2W-W End-of-line module 4-wire LSN wall-mount

for EN 54-13 compliant termination of LSN stubs or T-taps

Order number **FLM-420-EOL2W-W**

FDP 0001 A Dummy cover

For available module slots

Order number **FDP 0001 A**

PSK 0001 A Lettering strip for keys

20 sheets each with 6 strips, printable, for the functional modules BCM-0000-B, LSN 0300 A, LSN 1500 A, CZM 0004 A, NZM 0002 A, RMH 0002 A, CTM 0002 A and ENO 0000 B

Order number **PSK 0001 A**

PSL 0001 A Lettering strip for LEDs

20 sheets each with 10 strips, printable, for the ANI I0016 A Annunciator Module

Order number **PSL 0001 A**

Represented by:**Europe, Middle East, Africa:**

Bosch Security Systems B.V.
P.O. Box 80002
5600 JB Eindhoven, The Netherlands
Phone: + 31 40 2577 284
emea.securitysystems@bosch.com
emea.boschsecurity.com

Germany:

Bosch Sicherheitssysteme GmbH
Robert-Bosch-Ring 5
85630 Grasbrunn
Germany
www.boschsecurity.com

North America:

Bosch Security Systems, Inc.
130 Perinton Parkway
Fairport, New York, 14450, USA
Phone: +1 800 289 0096
Fax: +1 585 223 9180
onlinehelp@us.bosch.com
www.boschsecurity.us

Asia-Pacific:

Robert Bosch (SEA) Pte Ltd, Security Systems
11 Bishan Street 21
Singapore 573943
Phone: +65 6571 2808
Fax: +65 6571 2699
apr.securitysystems@bosch.com
www.boschsecurity.asia