




Power Supply Brackets

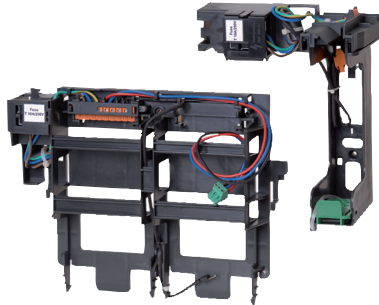

The Power Supply Brackets are installed in wall-mount housings and accommodate one Power Supply. The Power Supply Unit is immediately ready for operation via the pre-wired plug connection.

The brackets are made of glass-fiber-reinforced plastic and have a thermal sensor as well as a T10A mains fuse.

Installation/Configuration Notes

FPO-5000-PSB-CH Power Supply Bracket

- For the Modular Panel Housings:
 - HCP 0006 A
 - HBC 0010 A
 - HBE 0012 A

FPO-5000-PSB1 Power Supply Bracket

- For Power Supply Housing, wall mounting:
 - PSS 0002 A
 - PSB 0004 A
- The Power Supply Bracket is mounted in the middle right between a pair of batteries.

Overview

Housing	FPO-5000-PSB-CH	FPO-5000-PSB1
HCP 0006 A	x	-
HBC 0010 A	x	-
HBE 0012 A	x	-
PSS 0002 A	-	x
PSB 0004 A	-	x

x = Installation possible

- = Installation not possible

Parts Included

Qty.	Components
1	Power Supply Bracket

Technical Specifications

Mechanics

Material	PA6 Plastic, Grilon BS V0 (UL94 V-0)
Color	Satin finish, anthracite, RAL 7016
Weight	<ul style="list-style-type: none"> • FPO-5000-PSB-CH Approx. 550 g (19.4 ounces) • FPO-5000-PSB1 Approx. 395 g (13.9 ounces)

Environmental conditions

Permissible operating temperature -5 °C ... 50 °C (23 °F ... 122 °F)

Permissible storage temperature -20 °C ... 60 °C (-4 °F...140 °F)

Ordering Information

FPO-5000-PSB1 Power Supply Bracket
for PSS 0002 A and PSB 0004 A

FPO-5000-PSB1

FPO-5000-PSB-CH Power Supply Bracket
for HCP 0006 A, HBC 0010 A and
HBE 0012 A

FPO-5000-PSB-CH

Americas:
Bosch Security Systems, Inc.
130 Perinton Parkway
Fairport, New York, 14450, USA
Phone: +1 800 289 0096
Fax: +1 585 223 9180
security.sales@us.bosch.com
www.boschsecurity.us

Europe, Middle East, Africa:
Bosch Security Systems B.V.
P.O. Box 80002
5600 JB Eindhoven, The Netherlands
Phone: +31 40 2577 284
Fax: +31 40 2577 330
emea.securitysystems@bosch.com
www.boschsecurity.com

Asia-Pacific:
Robert Bosch (SEA) Pte Ltd, Security Systems
11 Bishan Street 21
Singapore 573943
Phone: +65 6258 5511
Fax: +65 6571 2698
apr.securitysystems@bosch.com
www.boschsecurity.com

Represented by